

Machine Features



- Push button spindle release.
- Includes sensor light to ensure proper mating of the chucks as well as correct full pneumatic pressure for safety
- Machine is equipped with safety device that prevents spindle from being released while rotating.



- Detail blow off nozzle included.



- Massive ANDI™ spindle provides precise repeatable machining.
- Spindle is equipped with an automatic braking system that quickly stops the tool from spinning during any shut down, and reduces change over time between setups.



- 15HP TEFC motor delivers consistent cut quality to the most difficult profiles.
- Factory set upper and lower limit switches prevent crashing.

NORTHTECH
Machine, LLC

www.NorthtechMachine.com

Machine Features




- Access door is equipped with shut off switch in the event the door is opened while the motor is running.
- Safety switch also prevents machine from running while open.



- Auxiliary elevation wheel is mounted to the motor, and is accessible from outside the machine body.



- Digital encoder is mounted to the gear reduction drive for precise spindle elevation settings through 727 Control.

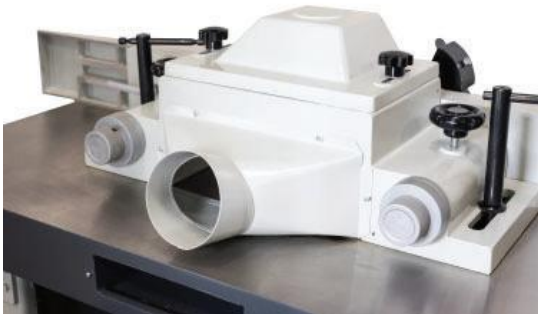

- (1) 5" dust port with integrated table intake provides free flowing air around spindle which greatly increases dust removal efficiency.

Machine Features



- Inverter controlled spindle means no pulley changes and the ability to match RPM to feed speed and tooling requirements for premium finish quality.



- Electrical parts are CE approved and neatly organized in the cabinet, with access safety switch.



- Fluid Lubricator Regulator (FLR) with pre-plumbed blow off nozzle before the regulator for maximum air flow.



- Auto initiated self cleaning protocol occurs during all spindle changes. This keeps debris out of high tolerance areas without the need of operators involvement, reducing long term maintenance costs.
- Removable table rings allows up to 13-1/4" diameter tooling.


Machine Features



- HSK63F Spindles change out quickly.
- (1) 1 1/4" x 2" under nut HSK-63F tool holder included



- Pivoting overarm control center allows individual operator comfort.
- Power lamp, spindle rotation selection, Amp meter, elevation positioning control, manual elevation buttons, spindle RPM turn knob, stop button, emergency stop, power switch, start button.

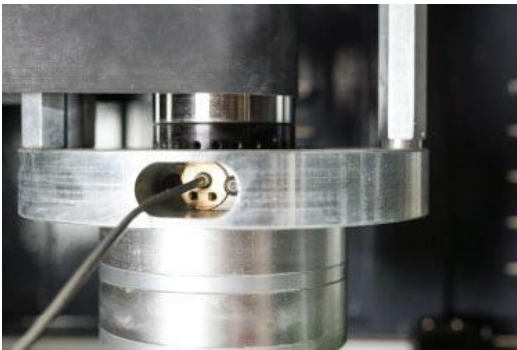

- Spindle brakes activates any time machine shut down is initiated.



- The NT 880S-HSK has a 38" x 61" webbed back precision ground table.

Machine Options



OPTIONAL

- Sliding table is equipped with pre tapped holes for hold downs.
- Sliding table is 12" x 51" and has over 54" of travel, +/- 29-1/4" slide. (12" x 61" on 880S)



OPTIONAL

- Router bit holder



OPTIONAL

- Pneumatic hold down with on board control switch is mounted to rotatable fence.

Machine Photos



NORTHTECH
Machine, LLC

www.NorthtechMachine.com