

# Machine Features



## Rotary Table

- The table can be swiveled to right and left for a maximum 60° angle cut.
- Table surface is precision ground.
- 41" table height



## Top Clamping

- The clamping mechanism is driven by air/oil cylinder in combination with the use of linear guide ways which result in smooth cycle operation and firm part hold.



- Locking pin for common angle cuts.
- The table is equipped with a lock pin system allowing 15°, 22°, 30°, 60°, 90°



- Illuminated safety enclosure with high rise full access door.

# Machine Features



- Ergonomically located control station with power indicator, saw stop and start, and air shut off.



- 660mm (26") x 4mm (1.6") x 120T Tungsten carbide tipped blade included.




- 10HP TEFC motor with match (3) v-belt drive.



- Inline adjustable oiler.

# Machine Features

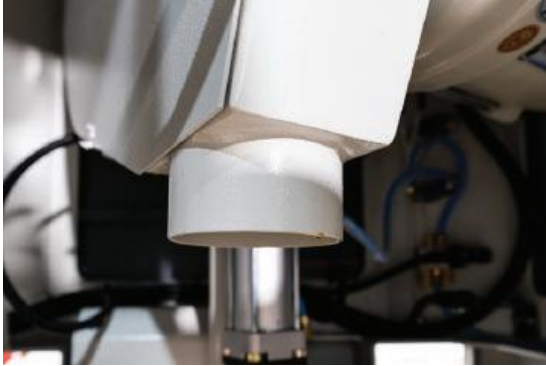

- 4" Dust port on bottom of saw enclosure requires 436CFM at point of extraction.



- Arbor lock pin for easy blade changes.



- Safety interlock restricts operator access into enclosure during operation.



- Secondary regulator allows independent pneumatical control of clamping pressure.


# Machine Features




- Single pneumatic connection with primary pressure regulation control.



- Manual oiler keeps rotary table lubricated for the smooth rotation of blade.

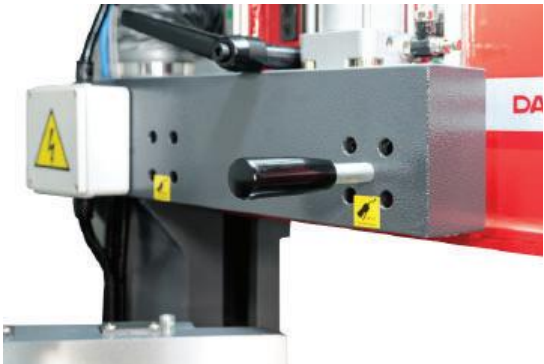

- Ergonomically placed handles allow operator to easily position saw angle.

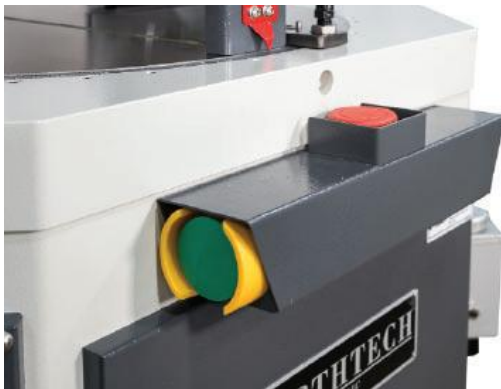

- Double palm activation requires operators engagement of both hands for complete cycle.

# Machine Features



- Blade stroke speed is independently controlled on up and down movement.
  - Located on the front side of the machine for quick access.
- 



- Individual power switch for light inside enclosure.
- 



- (2) 4" x 18" adjustable fences allow for repositioning of fence next to cut line for premium product support.
- 



- CE/UL approved electrical components neatly organized and labeled inside gasketed electric box.

# *Machine Features*




## *Db Rating*

- Unconnected standalone operating sound level of 71db.

# NT CS26RT-AS


## Cutting Capacity

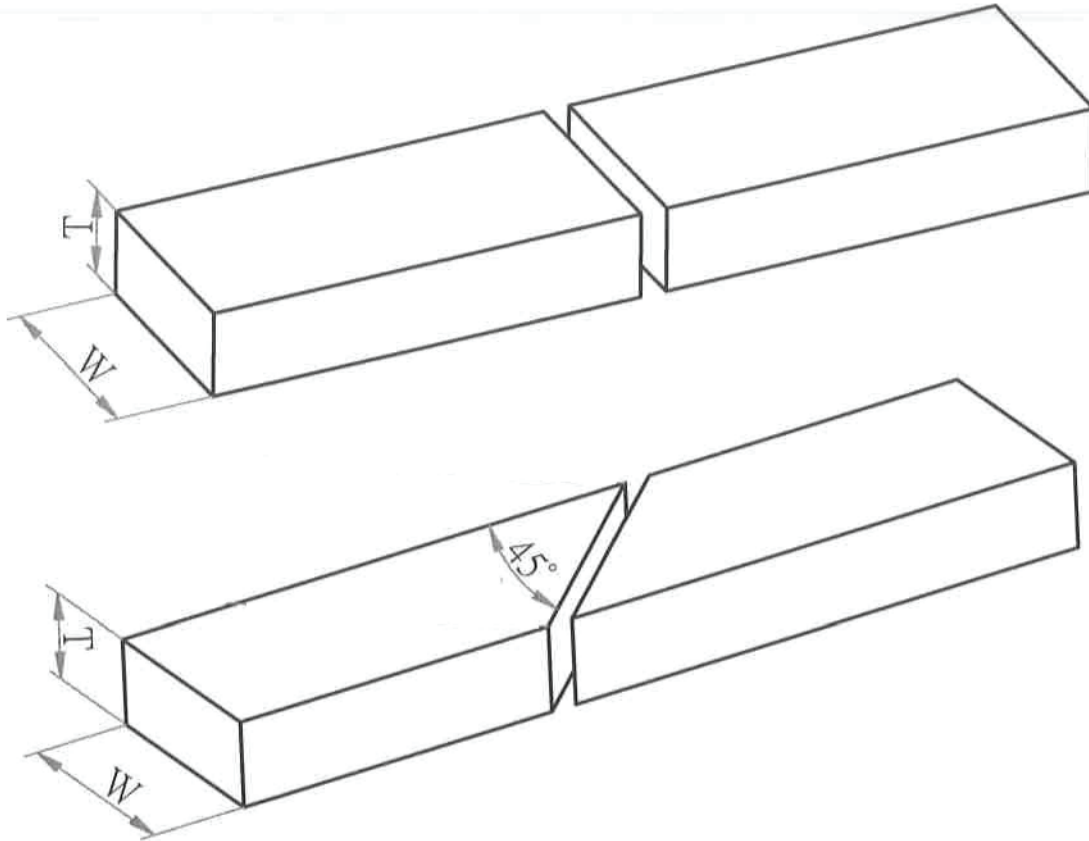

| Thickness (mm) (in) | Width 2 45" (mm) (in) |
|---------------------|-----------------------|
| 50 (2")             | 280 (11")             |
| 100 (4")            | 260 (10")             |
| 150 (6")            | 230 (9")              |
| 200 (8")            | 180 (7")              |
| 220 (8.7")          | 150 (6")              |

# NT CS26RT-AS

Cutting width of 90 degrees (mm)

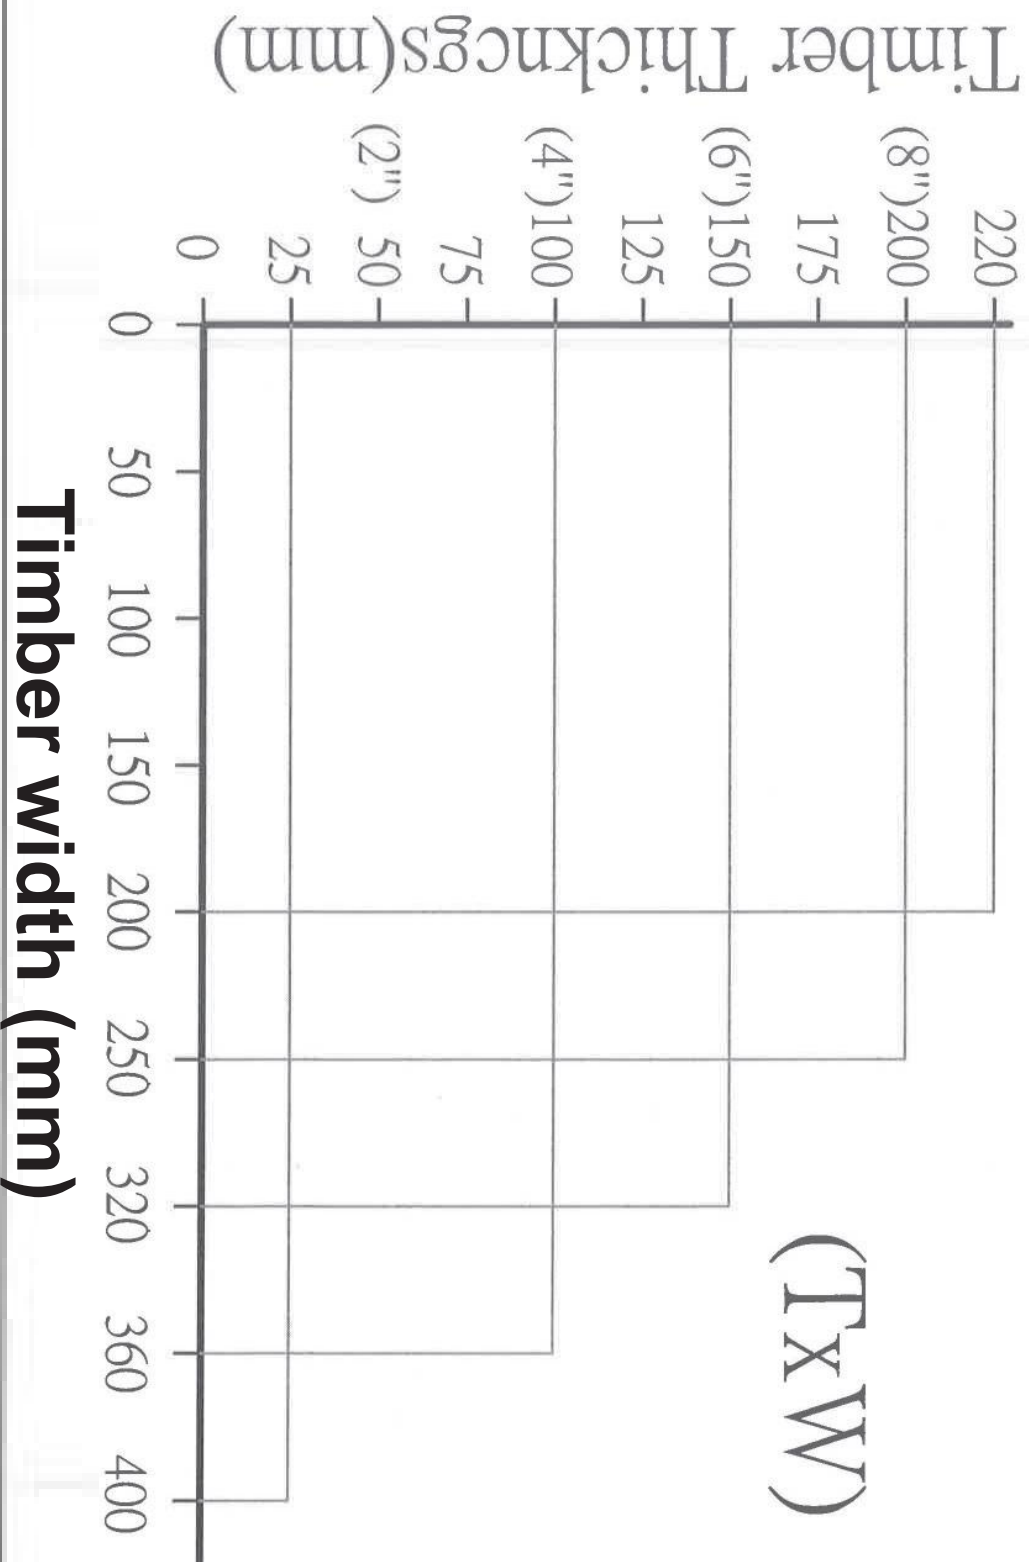

# NORTHTECH

*Machine, LLC*



NT-CS20RT shown for reference



102 Walnut Street  
Borden, IN 47106  
(812) 967-7400 Fax (812) 967-7401  
[www.NorthtechMachine.com](http://www.NorthtechMachine.com) [info@NorthtechMachine.com](mailto:info@NorthtechMachine.com)