

NORTHTECH

Machine, LLC

NT-J12 JOINTER



102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com

NORTHTECH

Machine, LLC

NT-J12 JOINTER

- 7.5HP Main Motor; 3PH, 230V/460V Dual Voltage
- Max Planing Width: 305mm (12")
- True Jointer bed positioning versus less true parallelogram style machines that have multiple pivoting wear points
- Max Cutting Depth: 19mm (3/4")
- Cutterhead Diameter: 100mm (4")
- Cutterhead: 5,200 RPM, (4) row helical head with (2) sided 30x12 x2.5 inserts
- Fence Size: 42" x 4.75"
- Fence Angle: 45~90°
- Table Area: 72" x 12"
- Table Height: 800mm (31.5")
- Machine Dimensions: 75" x 27" x 35"
- Packaging Dimensions: 79" x 27" x 40"
- Net weight: 861lbs
- Gross weight: 926lbs
- (1) Tool box
- Warranty is one year parts
- All machines are tested stateside prior to shipment providing trouble free start up.



F.O.B. Borden, IN

... \$10,800.00

Options:

- **Voltage change (add)**

... \$ 225.00

* Any shipping date quoted by Northtech is an estimation based on factory delivery. Northtech cannot guarantee delivery, nor do we assume any liability for delays or non-shipment arising from any cause. Pictures are for reference only, design and specifications of all Northtech Products sold are subject to change without notice *

102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com

Machine Features



- (2) Sided replaceable 30x12x2.5 inserts.
- Precision milled holes reduce air hammer noise while improving dust collection.
- 4 Diameter helical cutterhead for quiet operations and a smooth finish.



- Central control station with raised emergency stop button




- Adjustable stock removal on infeed via hand wheel.



- Quick visual gauge for stock removal reference.

Machine Features

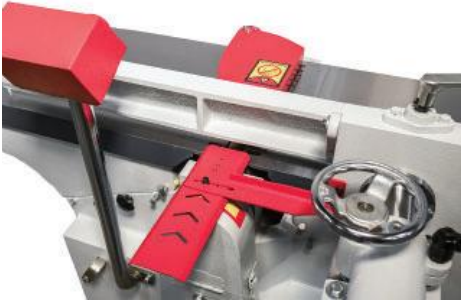

- Full coverage guarding.



- Heavy duty fence adjustment through hand wheel and speed lock handle.



- 4" Dust port requires 436CFM at point of extraction.




- V-belt drive delivers power from motor directly to cutterhead.

Machine Features



- Hand crank fence tilt provides a rigid support for angled surfacing.
-

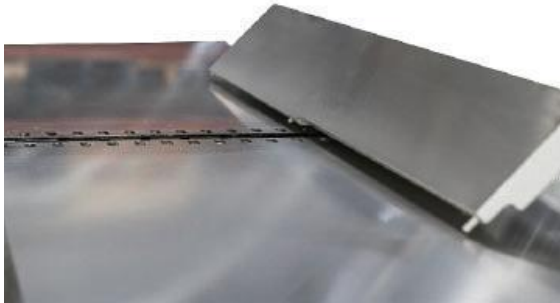

- Tiltable side fence 40-90°.
-



- UL/CE certified electrical components are housed inside the machine body for a smaller footprint.

NORTHTECH

Machine, LLC



102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com