


Machine Features



- 10HP belt driven TEFC motor is rated for continuous use.



- Control panel is ergonomically located with illuminated power supply which gives operator quick access to start/stop, and air shut off.

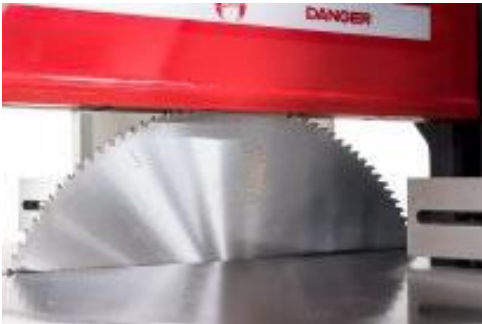


- 24" 120T Tungsten Carbide Tipped saw blade included.
- Access door equipped with safety switch restricting operator access during operations.



- A single pneumatic hook up with regulator is included.

Machine Features

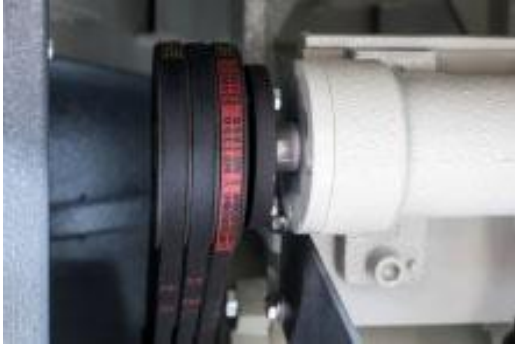

- Triple V Drive Belt System ensures full power transfer from motor to the blade.



- Guard has top clear view window panes for added visibility of cutting position.
- High rise hood gives operator unrestricted access.
- Illuminated safety enclosure restricts operator access when machine is running.



- Up and down stroke independently controllable for customer specific product requirements.
- Easily adjustable from operators position.



- Foot pedal operation is standard for cycle start.
- Double palm button operation is optional.

Machine Features



- Pin lock for quick and exact positioning on common used angles.
 - 15°, 30°, 45°, 60°, 90°
-



- Fences are easily adjustable to keep a tight clearance to clamp on varying angles.
-



- Extended steel handles for smooth control between angle changes.
 - Table rotates +/-60°.
-



- Manual oiler for lubrication on rotary table ensuring effortless table positioning.

Machine Features



- Spring loaded arbor lock for faster blade changes.



- CE/UL approved electrical components are organized and labeled inside gasketed electrical box.

Machine Options



OPTIONAL

- Optional Chrome plated table for added durability.



OPTIONAL

- Two handed cycle start requires operator to use both hands for the entire cycle.



OPTIONAL

- Safety enclosure and or access door equipped with safety interlock to restrict operator access during operation.



OPTIONAL


- Blade misting with pressurized lubrication reservoir with clear view fill gauge.
- Blade misting with adjustable Electronic Lubrication System misting nozzle for superior lubrication and cooling.



OPTIONAL

- Air/Hydraulic or hydraulic stroke available for the smooths cycles possible.

Cutting Capacity At 45 degrees

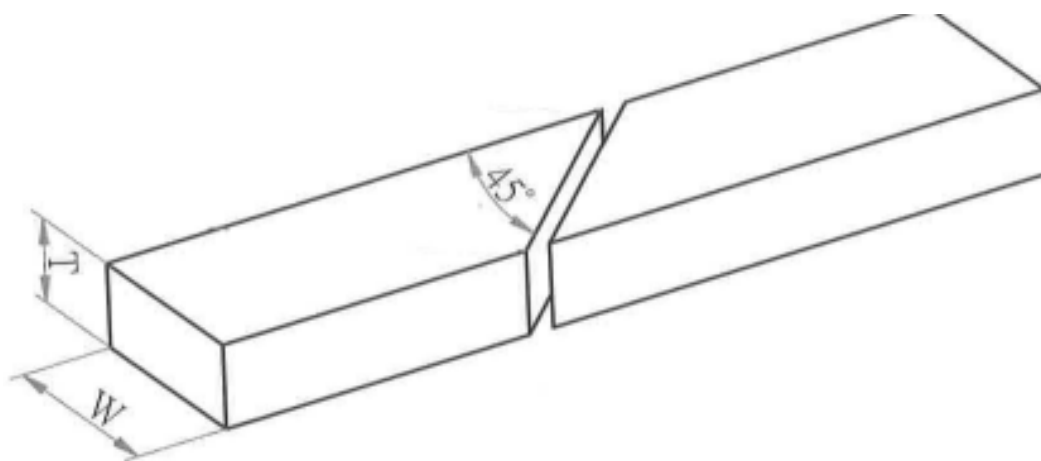

Thickness mm / inches	Width 2 (45°) (mm / inches)
50mm / 2"	280mm / 11"
100mm / 4"	260mm / 10.2"
150mm / 6"	230mm / 9"
200mm / 8"	180mm / 7.1"
220mm / 8.7"	150mm / 6"

Cutting Width of 90 degrees

