

Machine Features



- (2) Sided replaceable 30x12x2.5 inserts.
- Precision milled holes reduce air hammer noise while improving dust collection.
- 4 Diameter helical cutterhead for quiet operations and a smooth finish.



- Central control station with raised emergency stop button



- Adjustable stock removal on infeed via hand wheel.



- Quick visual gauge for stock removal reference.

Machine Features



- Full coverage guarding.



- Heavy duty fence adjustment through hand wheel and speed lock handle.




- 4" Dust port requires 436CFM at point of extraction.




- V-belt drive delivers power from motor directly to cutterhead.

Machine Features

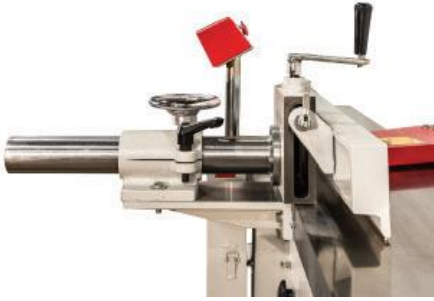

- Hand crank fence tilt provides a rigid support for angled surfacing.
-

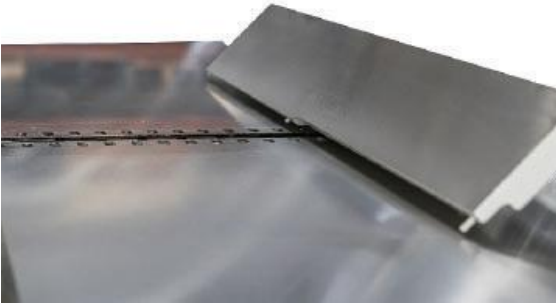

- Tiltable side fence 40-90°.
-



- UL/CE certified electrical components are housed inside the machine body for a smaller footprint.

NORTHTECH

Machine, LLC



102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com