




WL 15

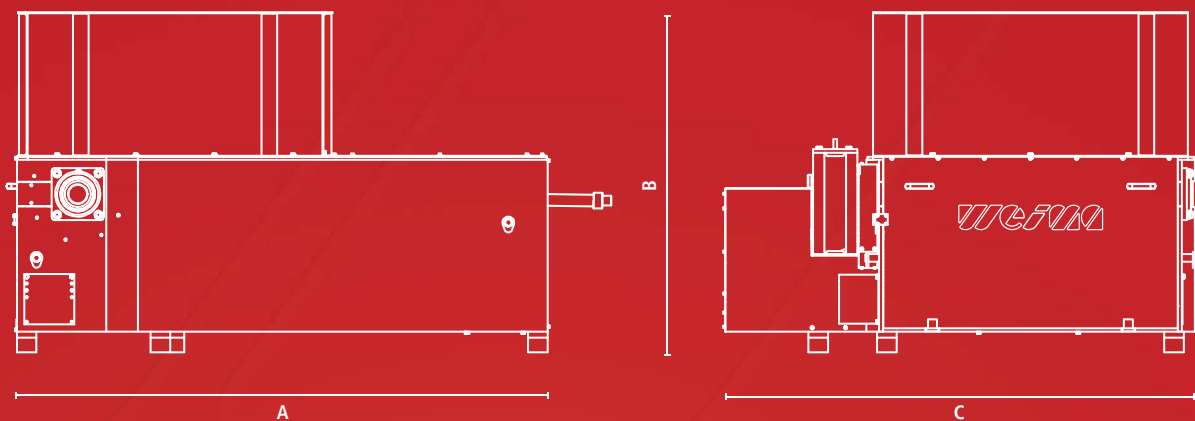

TECHNICAL SPECIFICATIONS		WL 6S	WL 10	WL 13	WL 15	WL 20
Length A	[mm]	2,100	2,100	2,100	2,700	2,700
Height B	[mm]	1,730	1,730	1,730	1,730	1,930
Width C	[mm]	1,700	1,890	2,260	2,420	3,100
Feed opening	[mm]	800 x 1,200	1,000 x 1,200	1,300 x 1,200	1,500 x 1,500	2,000 x 1,500
Hopper volume	[m ³]	1.0	1.3	1.6	2.3	3.0
Output	[kg/h]	*	*	*	*	*
Rotor length	[mm]	800	1,000	1,300	1,500	2,000
Rotor diameter	[mm]	368	368	368	368	368
Rotor speed	[rpm]	60–100	60–120	60–120	60–120	60–120
Drive capacity	[kW]	22/30/37	30/37/45	30/37/45	37/45/55/75	55/75/90/110
Tools	[knives]	23/42	28/52	37/70	43/82	57/110
Screen mesh aperture	[mm]	10–100	10–100	10–100	10–100	10–100
Extractor nozzle diameter	[mm]	200	200	250	250	250
Weight	[approx. kg]	2,600	3,000	3,400	4,200	5,500

* The output depends on the material being shredded and the screen size. Special design on request.
Demonstrations and trials with your material in our showroom can be arranged by appointment.