

Machine Features



- 1HP TEFC spindle motor rated for continuous use.



- Rotateable dovetail jig for a 4 pattern capability.



- Control center is ergonomically located on carriage assembly making it always conveniently located.



- Control box houses the start and emergency stop button.



- UHMW backers are quickly indexable providing smooth tear free cuts.
- Lineal scale for quick fence placements.

Machine Features




- Pneumatic clamps are independently actuated for easier part placement.
-



- (1) 4" Dust port requires 436CFM at points of extraction.
-



- Dust hood designed with direct dust extraction and is removable for easy dovetail bit access.
-

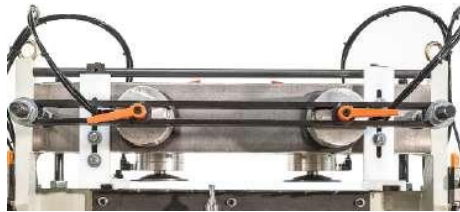

- Single spindle design.
 - (1) Single wing dovetail bit included.
-



- FLR included. The Filter Lubricator Regulator is mounted to the side of the machine for easy access.

Machine Features



- (2) Vertical non marking pneumatic hold downs equipped with speed lock handles for quick and easy setup.
 - Carriage is manually traversed across dual lineal rods for friction free movements.
-



- (2) Horizontal non marking pneumatic holddowns are individually operated and equipped with speed lock handles for quick and easy setup.
-



- Open face design provides high visibility to confirm parts are seated against the fence.

NORTHTECH

Machine, LLC



102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com