

Machine Features



- The NT-760 comes standard with a 25HP TEFC motor with high rib heat dissipation and is rated for continuous use.



- Serpentine drive system synchronizes all feed rollers, a unique feature to the Northtech single surface planers.
- Lockable access door provides plenty of room for maintenance.
- Handle is removable once locked for added safety.



- Helical Cutterhead with (6) rows of inserts.
- Each chip breaker is spring loaded and individually adjustable.



- (6) Rows of 15x15x2.5 inserts.
- These inserts can be rotated to a fresh sharp surface 4 times before replacing.

NORTHTECH
Machine, LLC

www.NorthtechMachine.com


Machine Features



- Control panel is on the left hand side of the machine and easily accessible when operating machine.



- Digital thickness control allows precise thickness changes at the touch of a button.
- Simply enter the desired thickness and hit enter and the table will adjust automatically.
- Front mounted emergency stop button.
- Power indicator light.

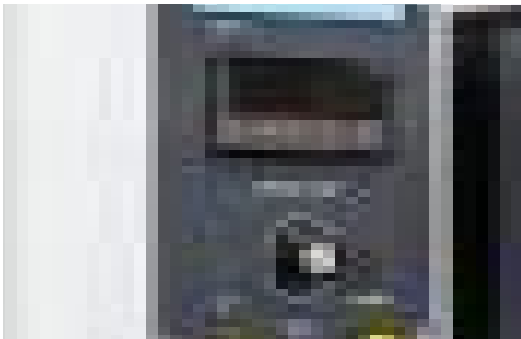

- Variable speed control by simply turning knob.
- Digital readout displays the feed speed clearly.



- Individually start and stop controls for feed and cutterhead.
- Secondary up and down push button thickness control.

Machine Features



- Dust hood flips out of the way for easier access to cutterhead during maintenance.



- Dust hood is equipped with a safety switch.
- Safety switch operates as an emergency stop and will restrict the machine from running when hood is open.



- Secondary linear scale for visual reference.



- Bed rollers are equipped with handle adjustment and speed lock.
- This allows operator quick access to make adjustments for feeding less than straight or flat material.

Machine Features



- UL/CE approved electrical components are neatly organized and labeled inside gasketed electrical box.
 - Gasketed electrical box is integrated with the frame of the machine for a reduced footprint.
-



- Anti-kick back fingers placed across the opening of the planer.
-



- (1) 6" Dust port requires 981CFM at point of extraction.
 - Dust hood has a secondary pivot allowing it to be opened when upper assembly hood is opened when primary hood is opened without the use of tools.
-



- Rear emergency stop for added operator and machine safety.

Machine Features



- Precision ground cast iron table provides a flat heavy duty surface for years of industrial use.



- Double jack table elevation control with dovetail slideways take the abuse of production running without added maintenance.
- Dovetail glides and jack screws are oversized and provide more stability than most 4 column design with less moving parts.

NORTHTECH

Machine, LLC



102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com