

Machine Features



- Strong 20HP TEFC motor rated for continuous use.



- Adjustable blade guides with backset roller and adjustable lubrication nozzle.



- 1" x 28" diameter steel wheels balanced for smooth operation.



- Adjustable spring loaded infeed holddown.

Machine Features




- (2) Non marking urethane infeed holddown rollers with counter balanced single urethane outfeed holddown.



- (4) 4" Dust ports to have 436CFM at points of extraction.



- Batwing style doors open from the center to provide unrestricted access when changing a blade.

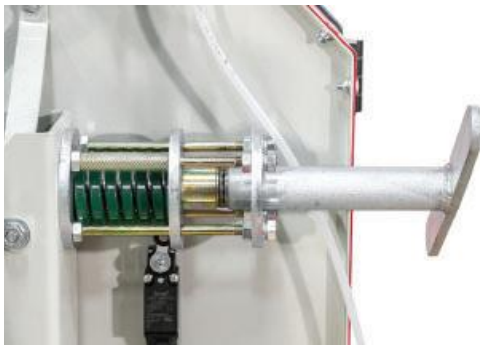


- Mechanical spring loaded blade tensioning system .

Machine Features



- (1) 1" x 168" carbide tipped blade included

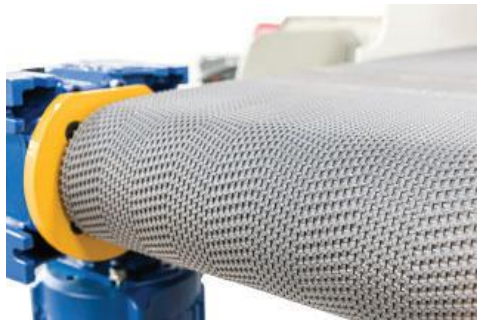

- 11-1/4" x 18' Rough top belt for seamless feeding.



- Inverter controlled feed speed through heavy duty gear box and direct drive motor.



- Secondary pressure control for lubrication system

Machine Features




- Quick change lubrication reservoir.



- Easily adjustable belt tensioning and tracking.

NORTHTECH

Machine, LLC

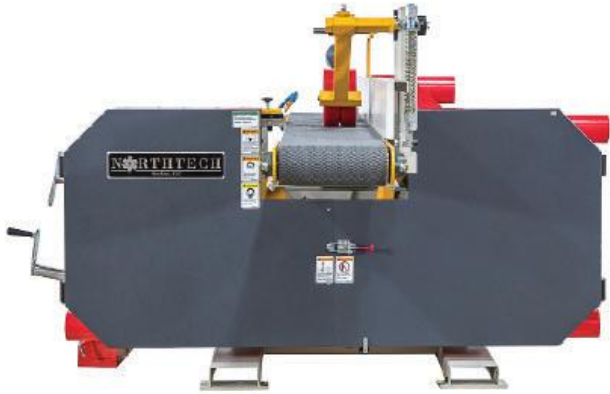

102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com