


Machine Features



MOTOR

- Strong 7.5HP TEFC motor powers through the toughest sanding.

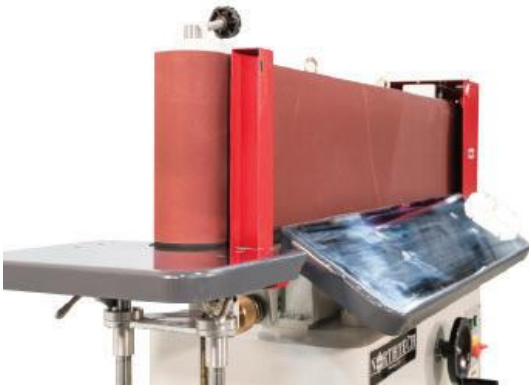

BELT TRACKING

- Belt tracking easily done through top mounted control adjustment.



BELT TENSIONER ADJUSTMENT

- Quick and easy access to belt adjustments.
- Rollers are precision balanced for vibration free operation.



DUST HOODS / GUARDS

- Northtech utilizes dual end guards for full dust control, and operator safety.

Machine Features



OSCILLATING

- Northtech Edge Sanders employ a direct oscillation drive gear for reduced energy consumption and more dependability over pneumatic systems.



BASE

- Heavy duty base is a cast iron constructed frame for vibration reduction and stability when working.



BACKER

- Full graphite backer allows total use of sandbelt.



TILT

- All Northtech side tables are tiltable from 0-45°.
- Position is held by double locking speed handles.

Machine Features



TABLE ELEVATION

- Table is raised and lowered individually through a synchronized dual shaft worm gear elevation system.
- 6" of elevation



CENTRAL CONTROL STATION

- Controls conveniently located, and equipped with operational lights.



Db Rating

- This machine has a 77 db rating when running.



TOOL BOX AND MANUAL

- Tool box including applicable tools as well as operator manual are included.

Machine Options



OPTIONAL

- Double sided table for an additional work cell comes with 10HP upgrade to prevent belt stalls during simultaneous sanding operations.
- Side table dimensions: (2) 10 x 48"
- Sanding belt size: 12" x 142" (Included)
- Machine / Packing Dimensions: 70" x 29" x 49" / 82" x 34" x 57"
- Net / Gross Weight:: 1,115 lbs / 1,174 lbs



OPTIONAL

- Two head single side machine for high production (NT-1248S-X2)
- Provides true 90° sanding
- Automatic pneumatic cycle
- (2) hand cycle operation
- 4-5 months

NORTHTECH

Machine, LLC



102 Walnut Street
Borden, IN 47106
(812) 967-7400 Fax (812) 967-7401
www.NorthtechMachine.com info@NorthtechMachine.com